



Model NV-452R 4-Channel Video Receiver



Features:

- Four active receiver channels in one product
- Full-motion CCTV video at distances up to 3,000ft (1km) when used with any passive NVT transceiver; 1 mile (1,6km) when used with NV-653T transmitter
- RJ45 or pluggable screw terminal connectivity
- Exceptional interference rejection
- Built-in transient protection and ground lifting
- Built-in brightness and sharpness controls; blue power LED, green active LED
- Compatible with qualified UTP cameras
- Best choice for DVR and high resolution applications over 750ft (225m)
- Two NV-452Rs may be rack mounted using the NV-RM8/10 Rack Panel Kit
- Limited lifetime warranty

The NVT Model NV-452R 4-channel Video Receiver is an active (amplified) device that allows the transmission of real-time monochrome or color video on up to 1 mile (1,6km) using Category Unshielded Twisted-Pair (UTP) telephone wire. The NV-452R provides signal conditioning in the form of ground lifting, distance EQ and transient protection.

The unparalleled interference rejection and low emissions of the Model NV-452R allow long run video signals to co-exist in the same wire bundle as telephone, datacom, or low-voltage power circuits. This allows the use of shared or existing cable plant. Ground-lifting ensures no annoying "hum-bars" when ground potential differences exist. With built-in transient protection, damaging voltage spike problems are eliminated. The built-in sharpness and brightness controls compensate for cable loss.

Network Video Technologies

4005 Bohannon Drive • Menlo Park, CA 94025 • USA
(+1) 650.462.8100 • 800.959.9870 • FAX (+1) 650.326.1940
nvt.com • info@nvt.com



Model NV-452R 4-Channel Video Receiver

Technical Specifications

VIDEO

Frequency Response	DC to 5 MHz
Adjustable Brightness and Sharpness Controls	
Common-mode / Differential-mode rejection	60 dB typ
15 KHz to 5 MHz	
Impedance	
Coax, female BNC	75 ohms
UTP, Screw terminal block or RJ45	100 ohms

LED INDICATORS


Blue "Power-On"; Green "Active" signal present

WIRE TYPE

Network Wiring	One Unshielded Twisted Pair (for each video signal) 24-16 AWG (0,5-1,31mm)
Category Type	2 or better
Impedance	100 ± 20 ohms
DC Loop Resistance	52 ohms per 1,000ft (18 ohms per 100m)
Differential Capacitance	19 pF/ft max (62 pF/m max)

CONNECTORS

Use either terminal or RJ45 (not both)



POWER

24VAC / DC (transformer not included) 250 mA max
One floating power supply may power multiple NV-452R receivers

ENVIRONMENTAL

Ambient temperature	+32 to +122 °F (0 to +50 °C)
Humidity (non-condensing)	0 to 95%
Transient Immunity	per ANSI / IEEE 587 C62.41

MECHANICAL

Dimensions, excluding brackets and connectors
7.3 x 2.35 x 1.65in (184 x 60 x 41mm)


Weight	0.7lb (0,32kg)
Material	Black ABS
Mounting	Two 0.175 in (4,4mm) diameter holes 6.75in (171,5mm) apart

Two NV-452Rs can be mounted to an NV-RM 8/10 Rackmount Panel

Specifications subject to change without notice.

Typical Application

Passive to Active Application up to 3,000ft (1km)

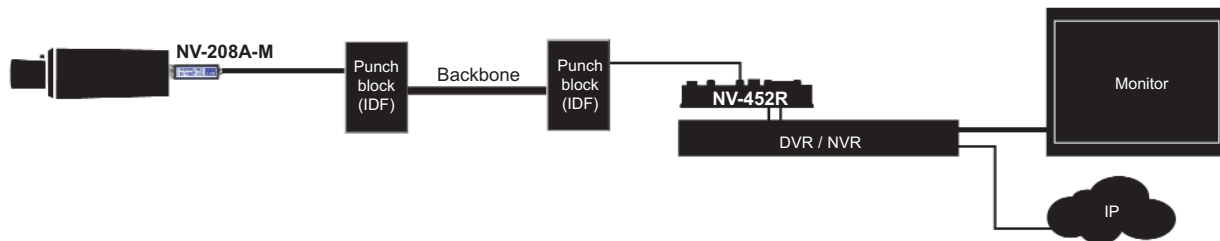

Network Video Technologies

4005 Bohannon Drive • Menlo Park, CA 94025 • USA
 (+1) 650.462.8100 • 800.959.9870 • FAX (+1) 650.326.1940
 nvt.com • info@nvt.com

Copyright © 2008 NVT, Inc.
411-764-1-G